




■ 台付直角定規 (JIS B7526規格精度品)

No.US-101

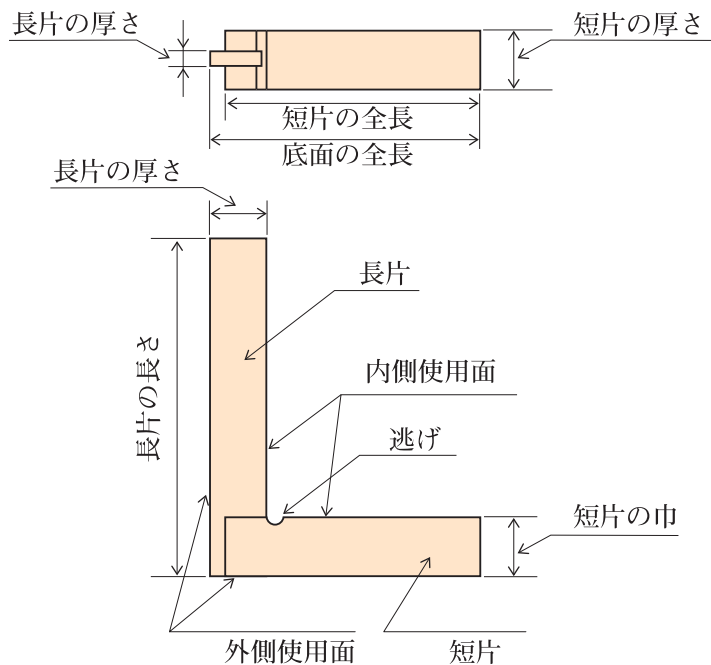

〔直角の算式〕

1級  $\pm (10 + \frac{L}{20}) \mu\text{m}$

〔真直度算式〕

1級  $(5 + \frac{L}{40}) \mu\text{m}$

L = 呼寸法 (mm)

1 級

焼 入

〔製作寸法表〕

品 番	長 片 (サイズ)	底面の 全 長	長 片 巾	長 片 厚	短 片 巾	短 片 厚	直 角 度	重 量
ULAY-75	75	50	16	2.5	15	12	±0.014	0.1kg
ULAY-100	100	70	18	2.5	18	12	±0.015	0.15
ULAY-125	125	80	20	3	18	12	±0.016	0.3
ULAY-150	150	100	24	3	22	18	±0.018	0.5
ULAY-200	200	130	30	3	28	20	±0.02	0.7
ULAY-250	250	165	35	5	35	24	±0.022	0.9
ULAY-300	300	200	35	5	35	24	±0.025	1.4
ULAY-350	350	200	35	5	35	24	±0.027	2.0
ULAY-400	400	200	47	5	46	30	±0.03	2.5
ULAY-450	450	250	47	5	46	30	±0.032	3.5
ULAY-500	500	300	47	5	46	30	±0.035	5.4
ULAY-600	600	350	47	5	55	30	±0.04	6.6
ULAY-750	750	400	60	8	61	46	±0.048	14.5
ULAY-1000	1000	550	65	10	80	60	±0.06	29.0
ULAY-1500	1500	620	80	10	85	60	±0.085	40.0
ULAY-2000	2000	830	100	10	100	70	±0.11	70.0